


TORQUE ASSIST - WD613 B400X80

Maximale toegelaten snelheid in vrijloop: 40km/h.
 Optioneel met trommelrem 400x80.


Technische data:

Aantal Stelsels	Reductie verhouding	$M_{int.}$ [Nm]	$M_{max.}$ [Nm]	$n_1 cont.$ [rpm]	$n_1 int.$ [rpm]	P_n [kW]	P_t [kW]
2	18 – 21 – 25 – 30 – 37 – 42	8.900	13.400	3.100	4.200	45	33
3	54 – 65 – 73 – 83 – 93 – 97	10.000	16.200				

HYDR. SERVO DRUMBRAKE

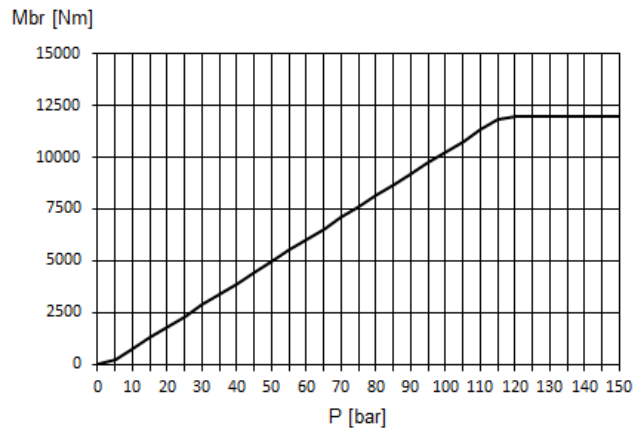

BEARING LIFE VS. RADIAL LOAD

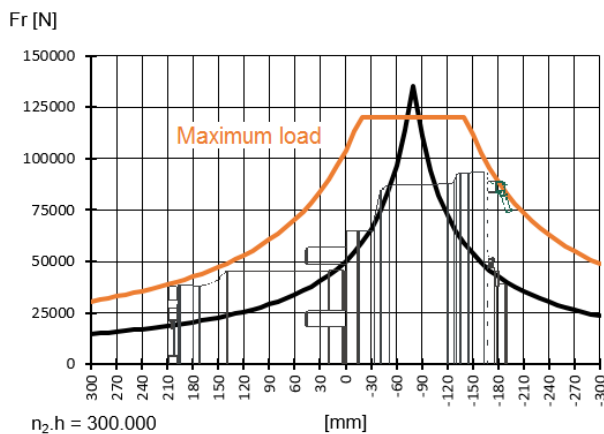

Load corrective factor

$n_2.h$	kf
20.000	2,25
40.000	1,8
60.000	1,6
80.000	1,5
100.000	1,4
200.000	1,13
400.000	0,92
800.000	0,75
1.000.000	0,7

